



Intertek
9700845

ETL LISTED
CONFORMS TO
NFPA STD 79
UL STD 508
UL SUBJECT 2011
CERTIFIED TO
CSA STD C22.2 NO. 73

HAAS MILL MODEL
UMC-400

HAAS AUTOMATION, INC.
2800 STURGIS RD, OXNARD, CA. 93030
www.HAASCNC.com

SERIAL NUMBER.....	1217233	CE EAC UK CA
DATE OF MFG.....	09/2025	
VOLTAGE.....	220	
PHASE.....	3	
HERTZ.....	50/60	
FULL LOAD.....	40 AMPS	
LARGEST LOAD.....	35 AMPS	

SHORT CIRCUIT INTERRUPTING CAPACITY - 10,000 AMPS

WIRING DIAGRAM..... 96 0294

SHORT CIRCUIT CURRENT - 5,000 AMPS RMS SYMMETRICAL
ARC FLASH RATING: 208 - 240VAC MODELS HRC-1,
360-480VAC MODELS HRC-2

NEMA TYPE 2 ENCLOSURE - FOR INDOOR USE ONLY.
OVER CURRENT PROTECTION PROVIDED
AT MACHINE SUPPLY TERMINALS.

Export Control Notice - This Machine Is an Export Restricted Product - Diversion Contrary to Law Is Prohibited

The export, re-export and in-country transfer of this machine are subject to United States Export Administration Regulations and may be subject to other export regulations as applicable, including but not limited to European Union export regulations.

P/N 29-10048E Rev. A















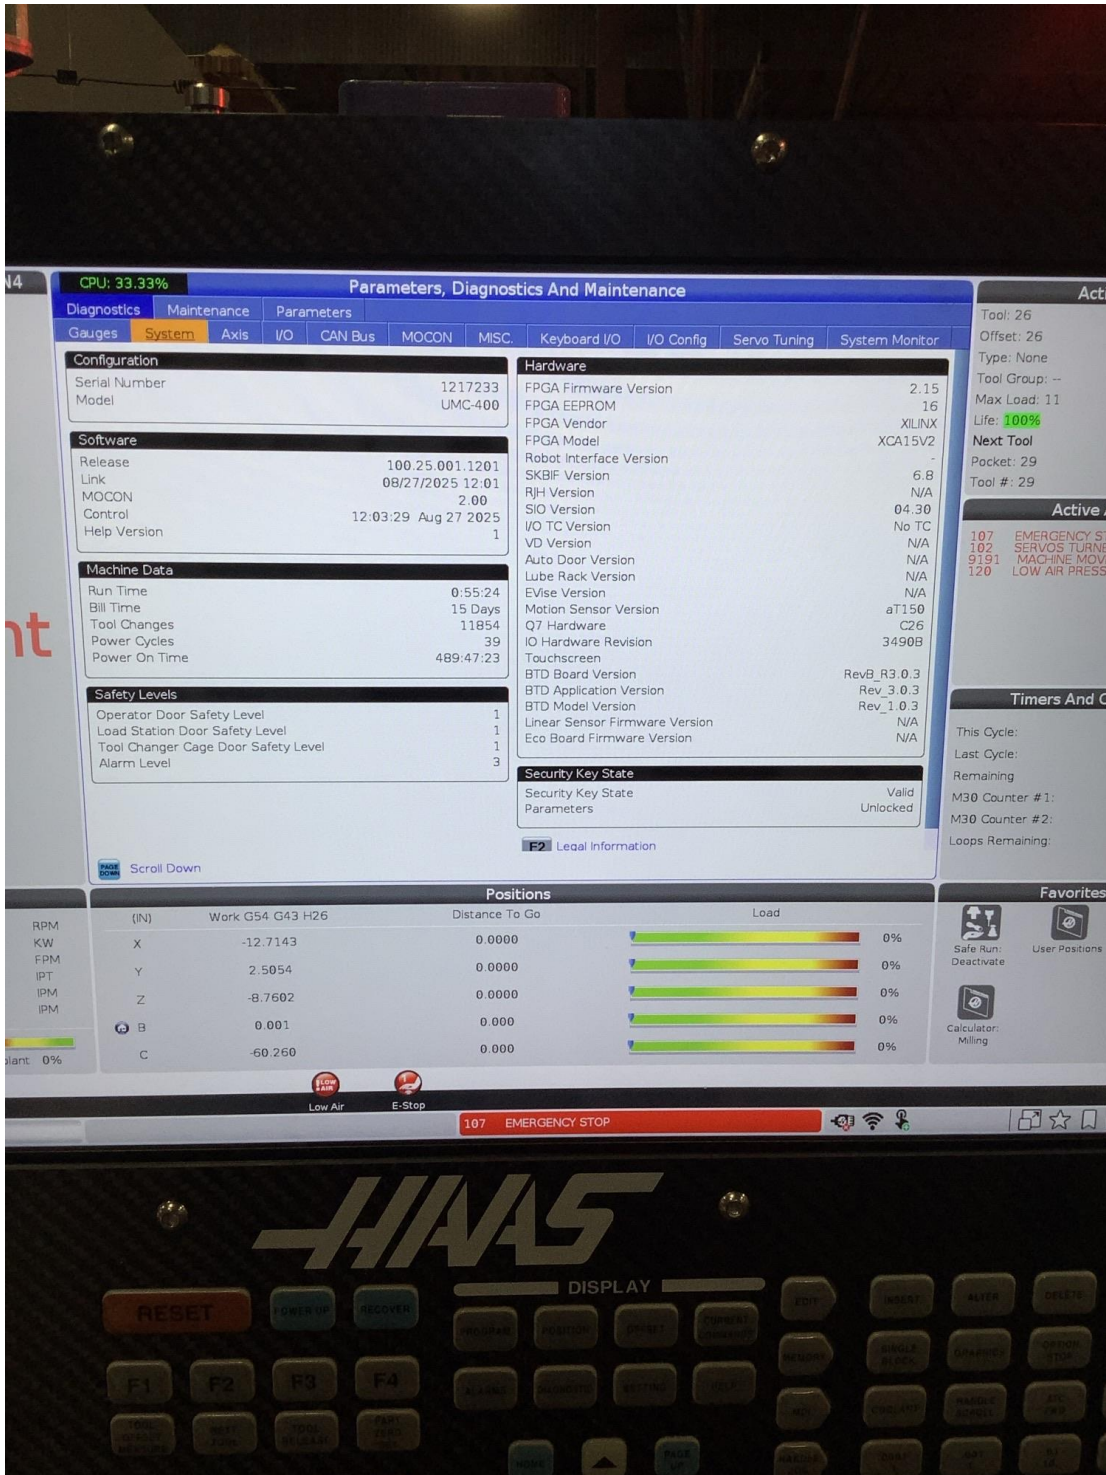

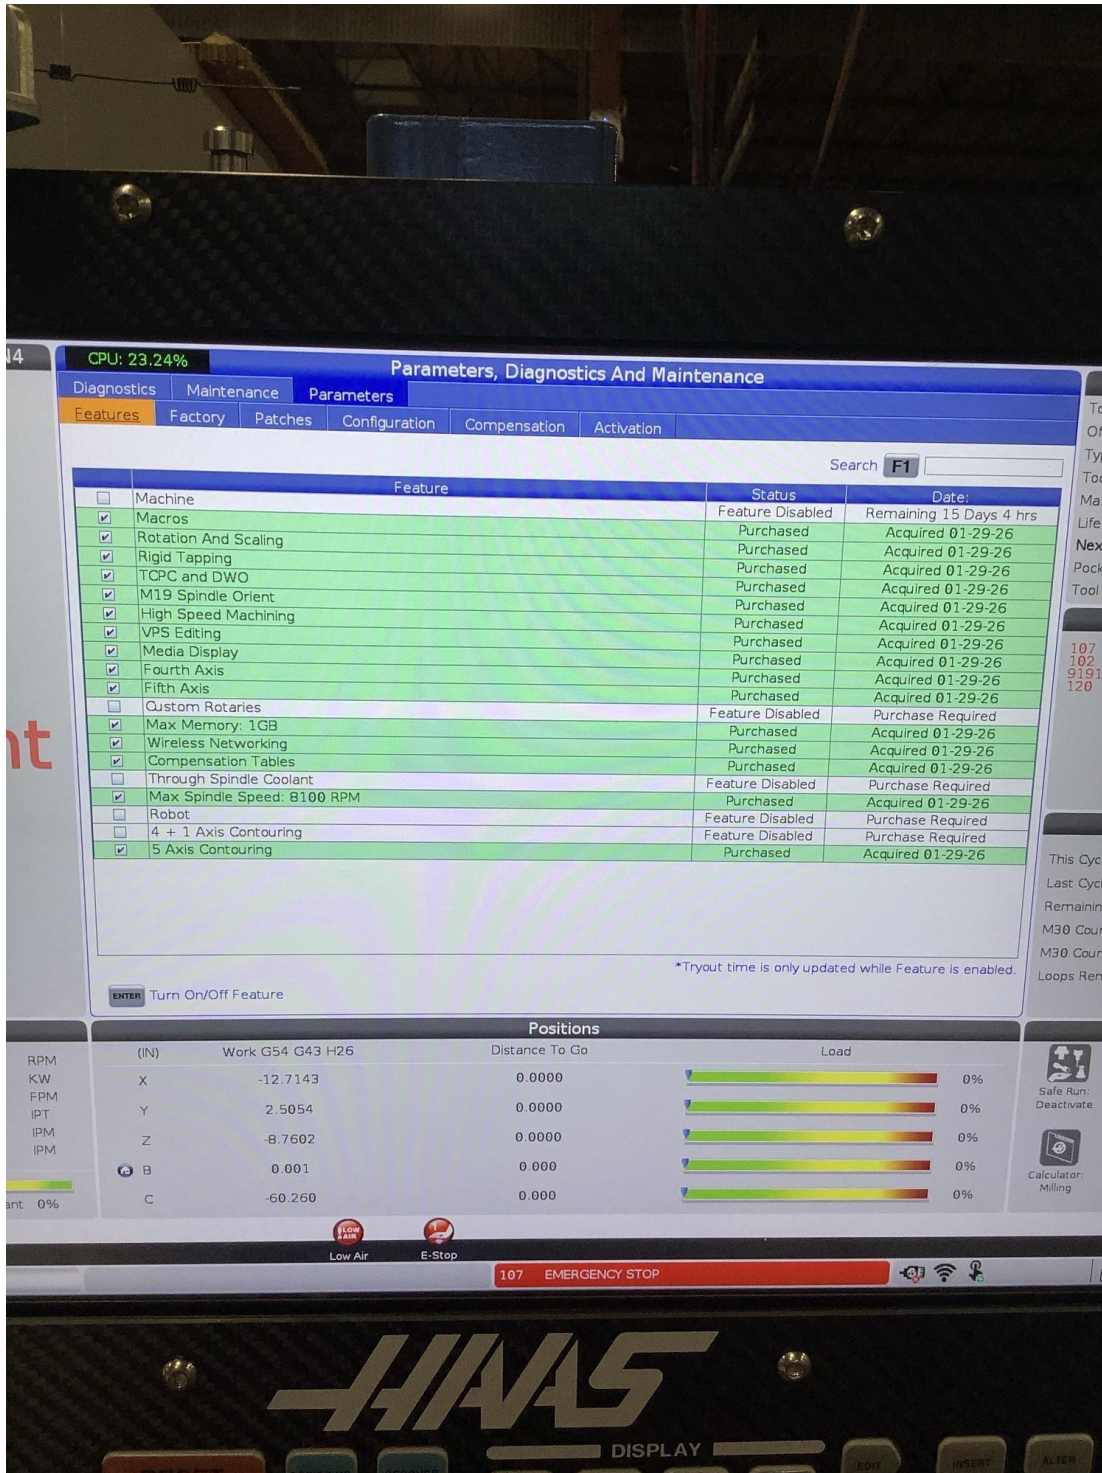

3.03%

Parameters, Diagnostics And Maintenance

System Axis I/O CAN Bus MOCON **MISC.** Keyboard I/O I/O Config Servo Tuning System Monitor

Search **F1**

Type	Name	Value	Filter
Performance	Total Errors (Rx)	0	<input type="checkbox"/>
Performance	Total Crc Errors (Rx)	0	<input type="checkbox"/>
Performance	Total Sequence Errors (Rx)	0	<input type="checkbox"/>
Performance	Total Errors (Tx)	0	<input type="checkbox"/>
Performance	Total Crc Errors (Tx)	0	<input type="checkbox"/>
Performance	Total Sequence Errors (Tx)	0	<input type="checkbox"/>
Performance	Qos (Total)	0.0	<input type="checkbox"/>
ControlInfo	Packets Lost From Control	0	<input type="checkbox"/>
UpCompe...	Remaining Warmup Time	0:00:00	<input type="checkbox"/>
SystemData	SD Card CID	Not Available	<input type="checkbox"/>
SystemData	User Data Mount	Not Available	<input type="checkbox"/>
SystemData	Flash Memory Size	15 GB	<input type="checkbox"/>
SystemData	Run Time	0:55:39	<input type="checkbox"/>
SystemData	Power On Time	489:47:36	<input type="checkbox"/>
SystemData	Spindle Time	100:12:29	<input type="checkbox"/>
SystemData	Spindle Motor Temperature	63.477°F	<input type="checkbox"/>
SystemData	Servo Time	158:38:00	<input type="checkbox"/>
SystemData	Total Feed Time	53:16:50	<input type="checkbox"/>
SystemData	Motion Time	90:53:30	<input type="checkbox"/>
SystemData	Number of Tool Changes	11854	<input type="checkbox"/>
SystemData	Number of Gear Changes	0	<input type="checkbox"/>
SystemData	Axis TT 3 Invalid Encoder Count	0	<input type="checkbox"/>
SystemData	Axis TT 3 Invalid Encoder Count	0	<input type="checkbox"/>
SystemData	Axis TT 3 Invalid Encoder Count	0	<input type="checkbox"/>
SystemData	Axis X Total Y/D Recovery Count	0	<input type="checkbox"/>
SystemData	Axis TT 3 Invalid Encoder Count	0	<input type="checkbox"/>
SystemData	Axis TT 2 Invalid Encoder Count	0	<input type="checkbox"/>


ENTER Select filter criteria **ALTER** Filter by selected criteria **F2** Clear all filters

Positions

(IN)	Work G54 G43 H26	Distance To Go	Load
X	-12.7143	0.0000	0%
Y	2.5054	0.0000	0%
Z	-8.7602	0.0000	0%
B	0.001	0.000	0%
C	-60.260	0.000	0%

Low Air E-Stop

107 EMERGENCY STOP



DISPLAY

