





GM-1, GM-2
8100/10,000-rpm, Inline-Drive Spindle
40 Taper – 30 hp
Standard: GM-1, GM-2 (8100 rpm)
Optional: GM-1, GM-2 (10,000 rpm)



Values shown are 200% spindle load

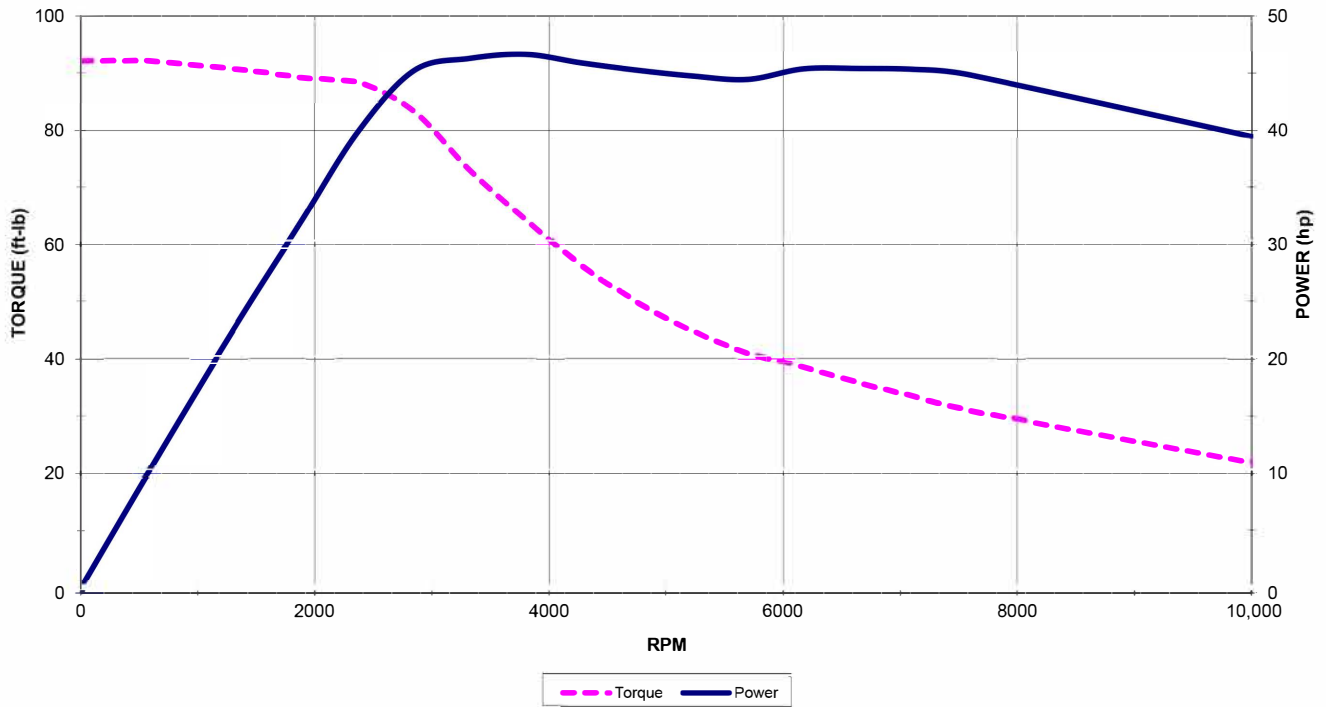


GM-1, GM-2
8100/10,000-rpm, Inline-Drive Spindle
40 Taper – 22.4 kW
Standard: GM-1, GM-2 (8100 rpm)
Optional: GM-1, GM-2 (10,000 rpm)

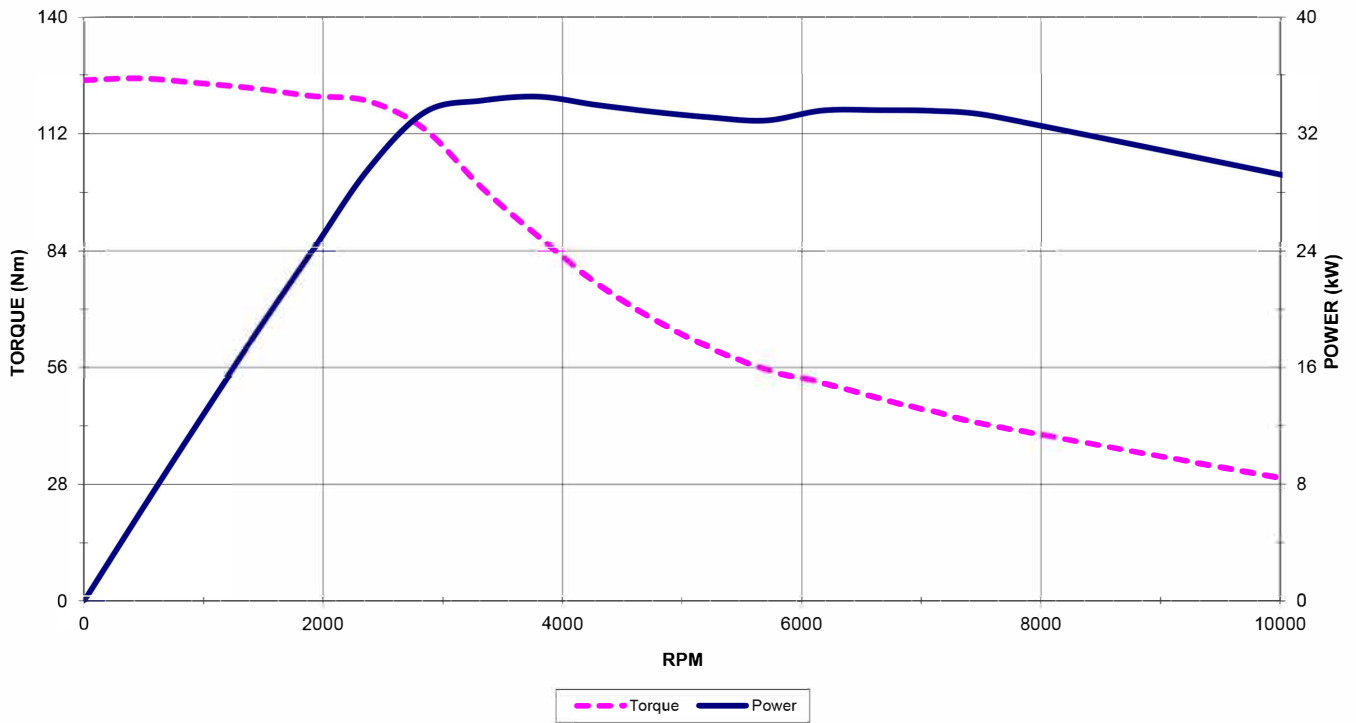

Values shown are 200% spindle load




GM-1, GM-2
15,000-rpm, Inline-Drive Spindle
40 Taper – 30 hp
Standard: None
Optional: GM-1, GM-2

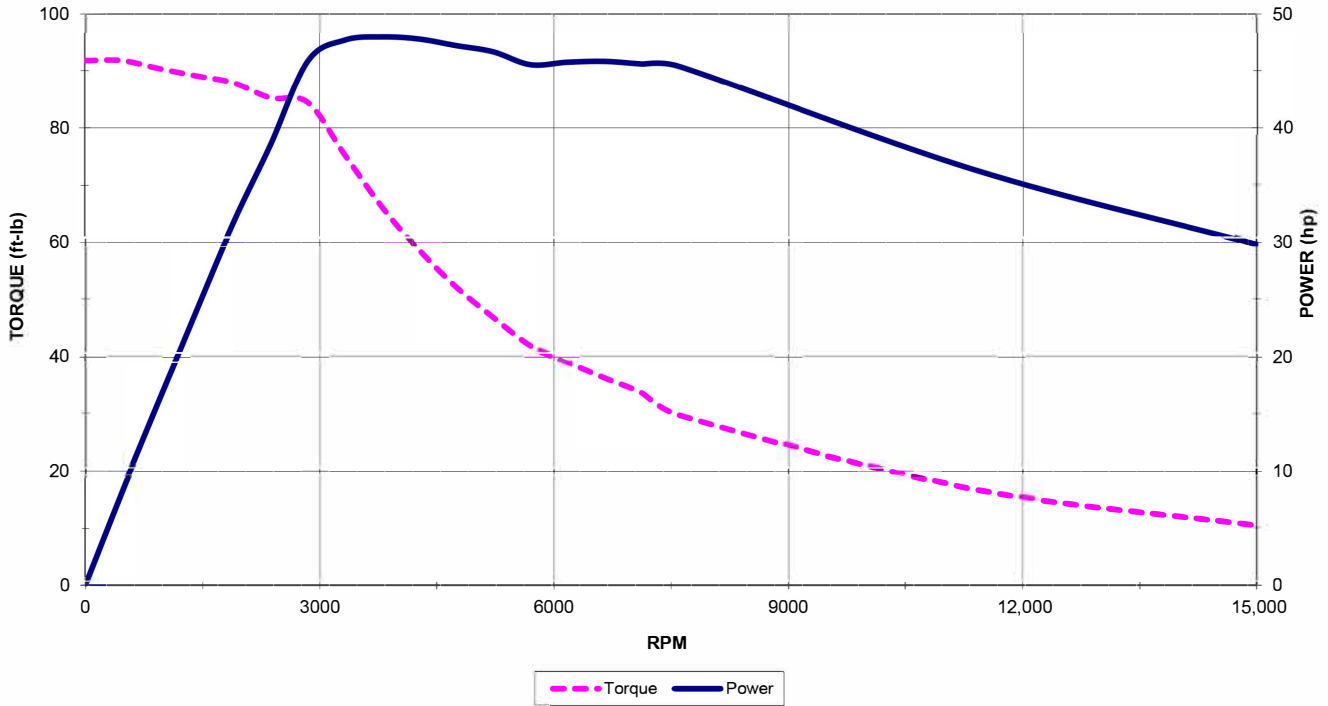

Values shown are 200% Spindle Load



GM-1, GM-2
15,000-rpm, Inline-Drive Spindle
40 Taper – 22.4 kW
Standard: None
Optional: GM-1, GM-2

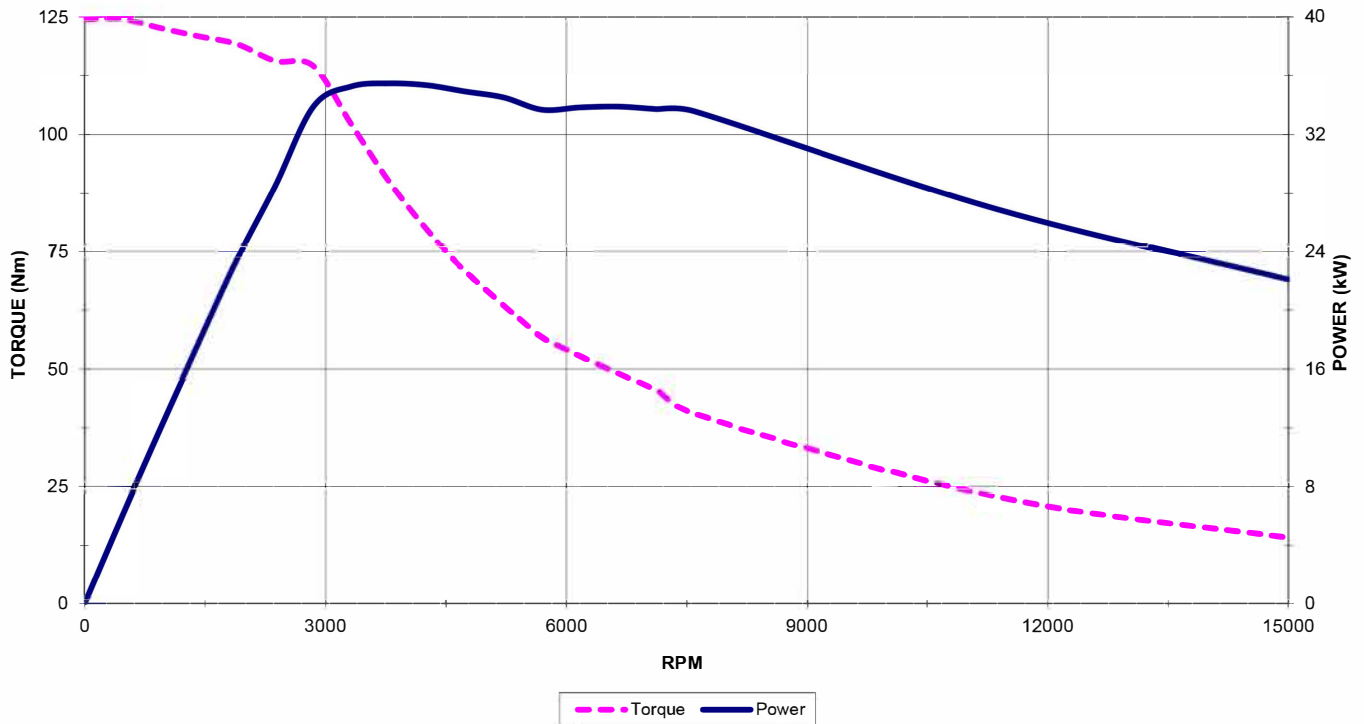

Values shown are 200% Spindle Load