





TOP VIEW


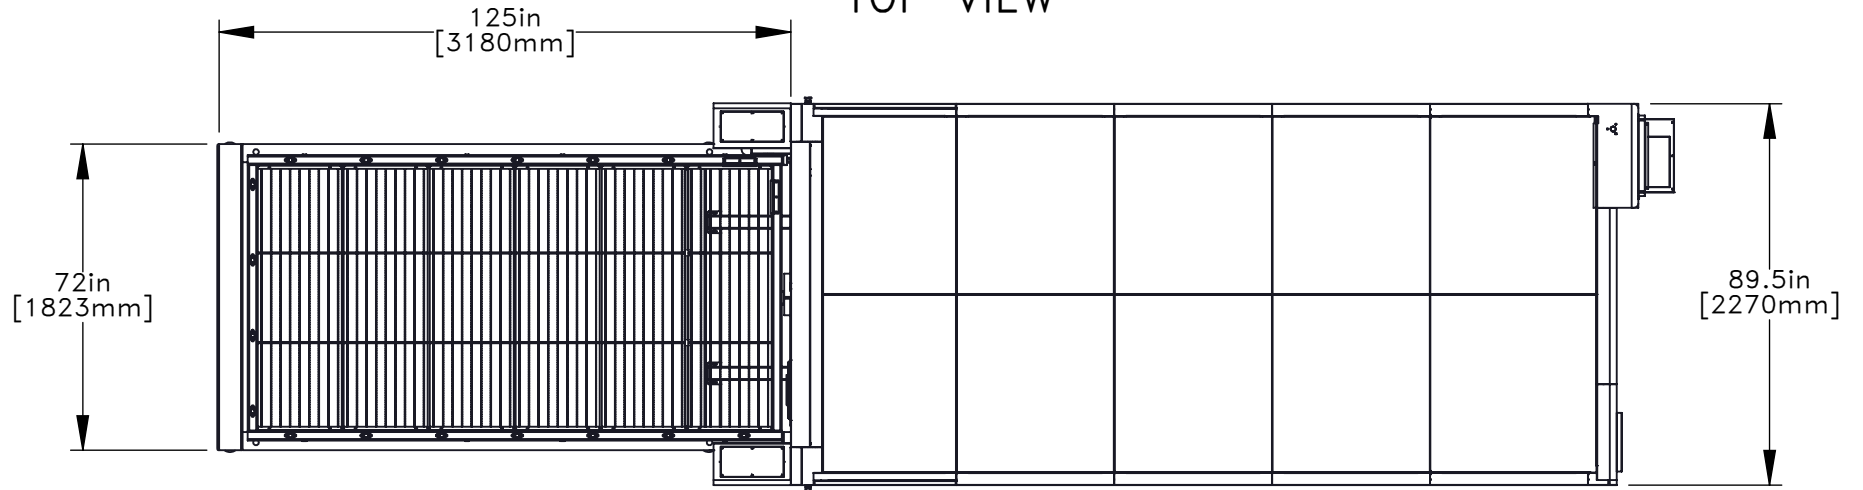


SIDE VIEW


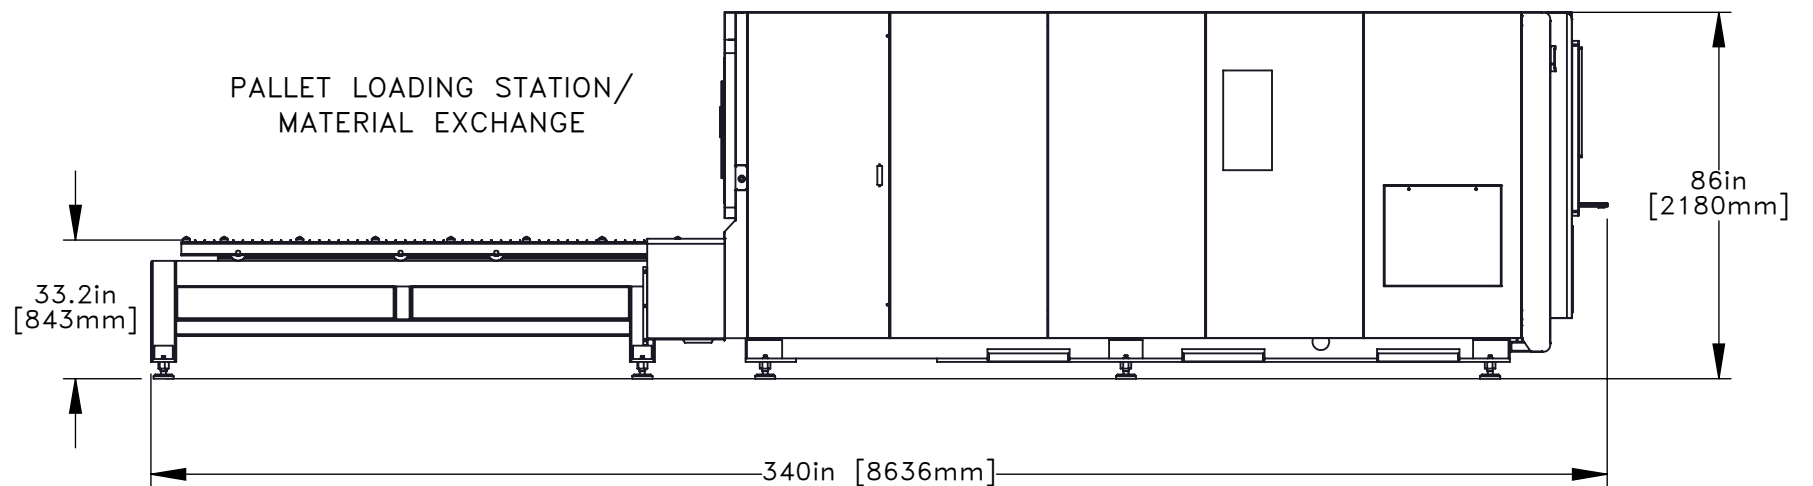




MINIMUM 24in [610mm] RECCOMENDED SIDE TO SIDE SPACE BETWEEN SUPPORT EQUIPMENT BELOW

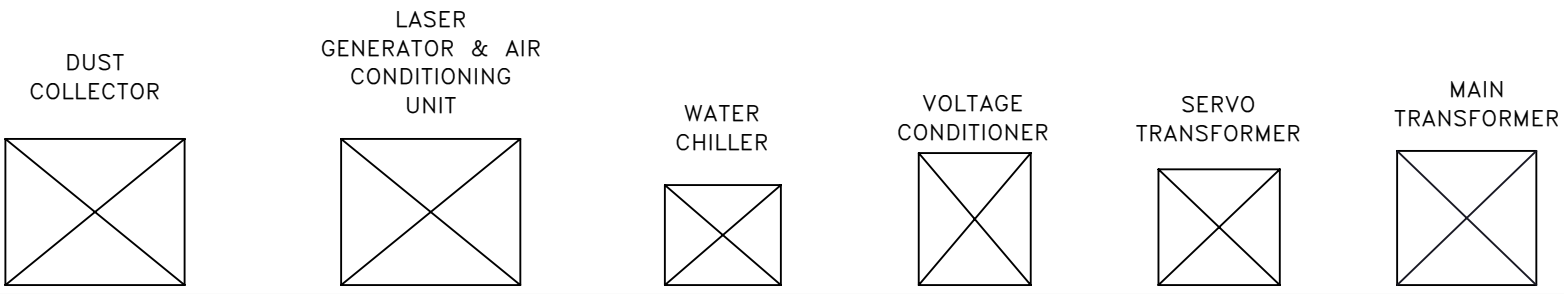

40in [1000mm] Minimum Aisle Clearance

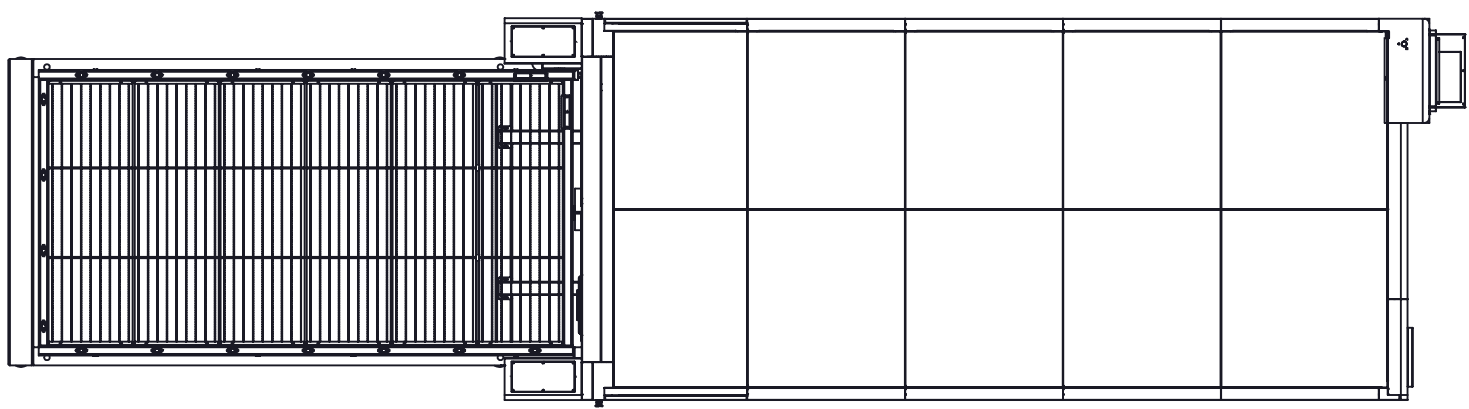


CAREFUL PLANNING SHOULD BE DONE TO ALLOW WALL DISTANCES FOR MATERIAL LOADING, MACHINE MAINTENANCE AND SUPPORT EQUIPMENT



MINIMUM RECCOMENDED SEPERATION
DISTANCE BETWEEN COMPONENTS

WALL

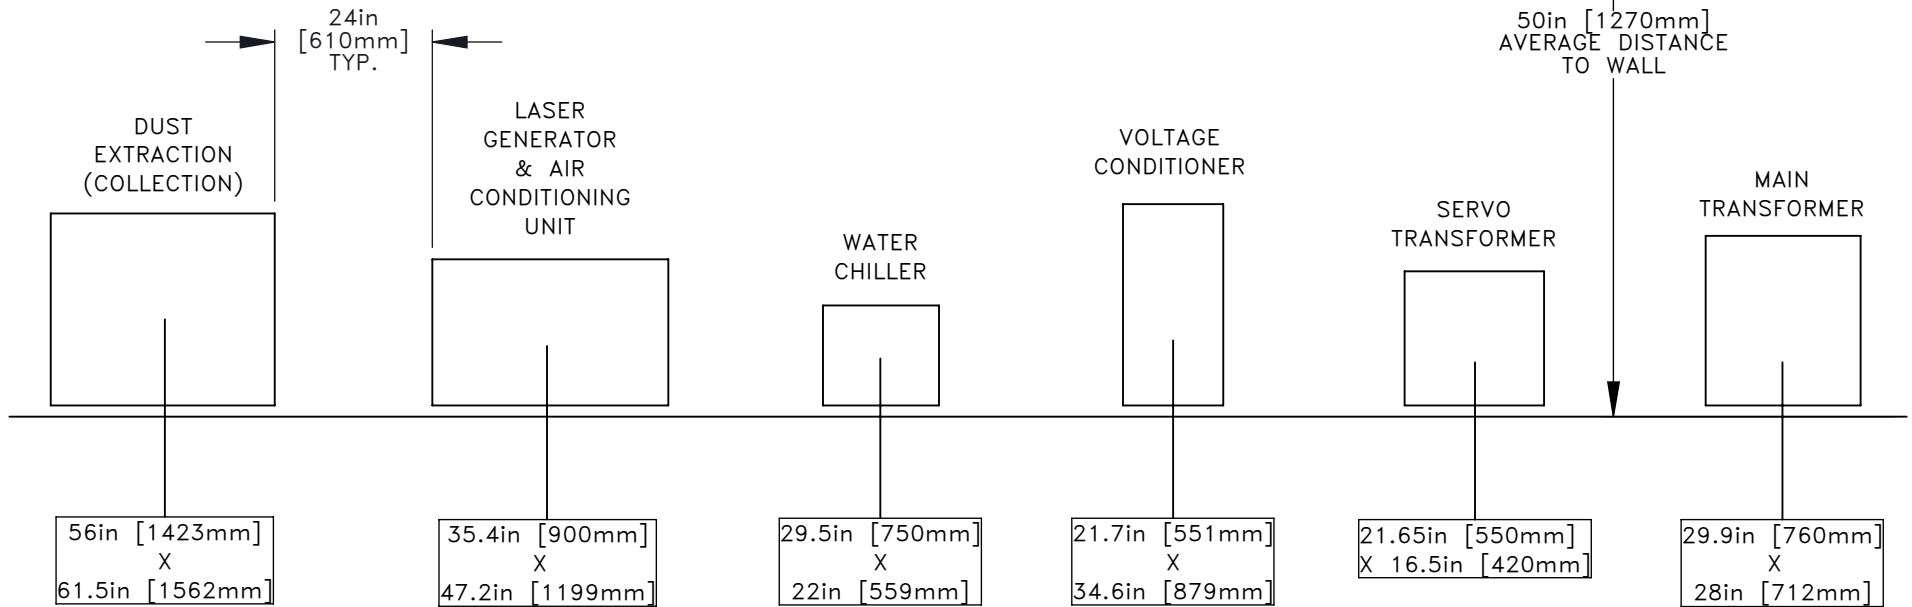

*AIR COMPRESSOR AND DRYER NOT INCLUDED WITH THE HFL-3015.
99.95% PURE OXYGEN AND/OR NITROGEN SOURCE IS THE RESPONSIBILITY OF THE USER

- SEE OPERATIONS SECTION OF MANUAL FOR CUTTING GAS PSI REQUIREMENTS