


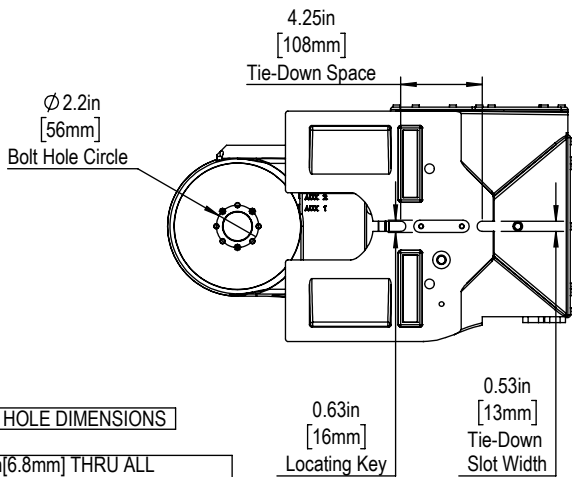
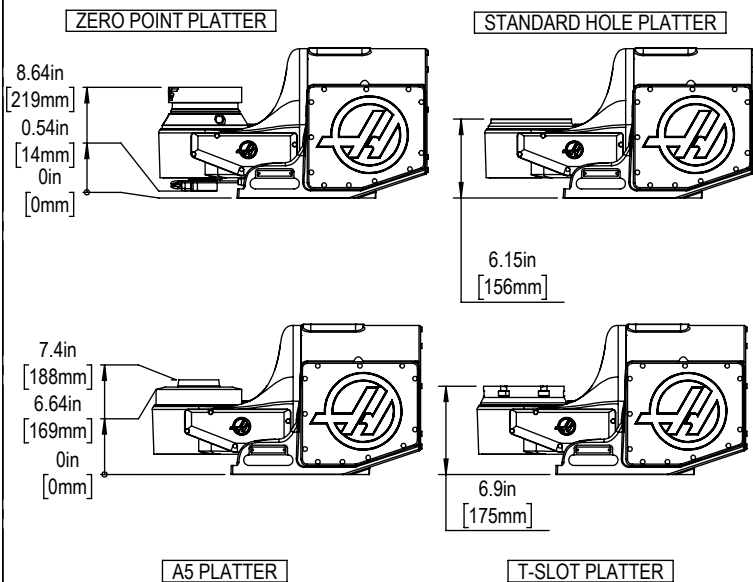
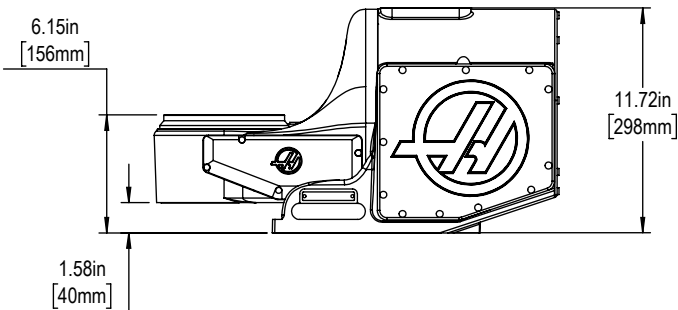
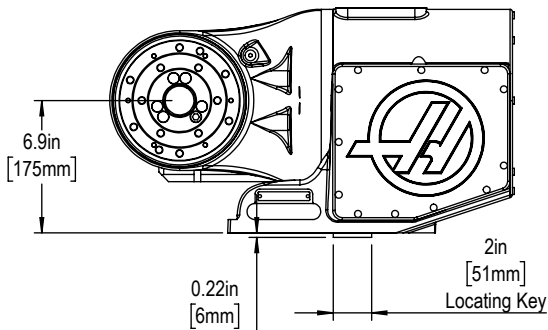
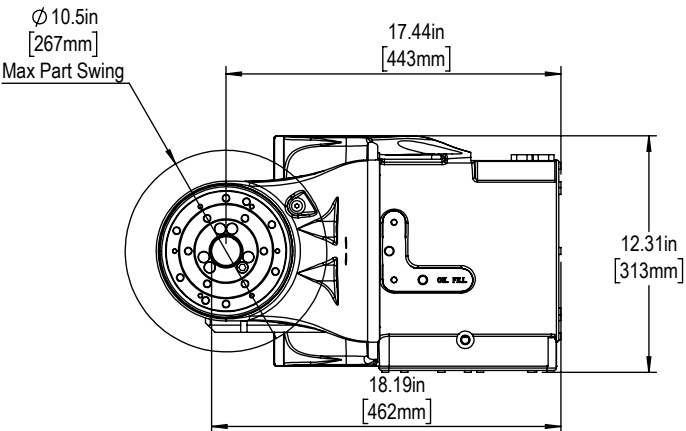
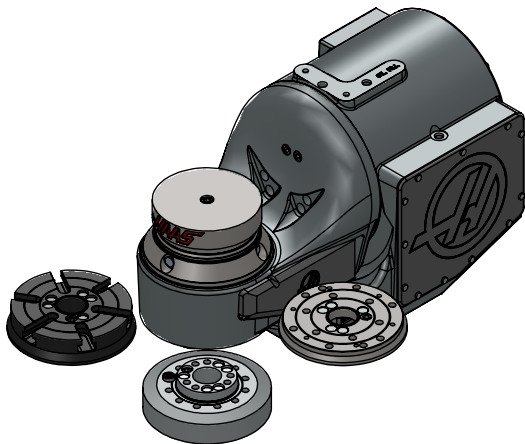


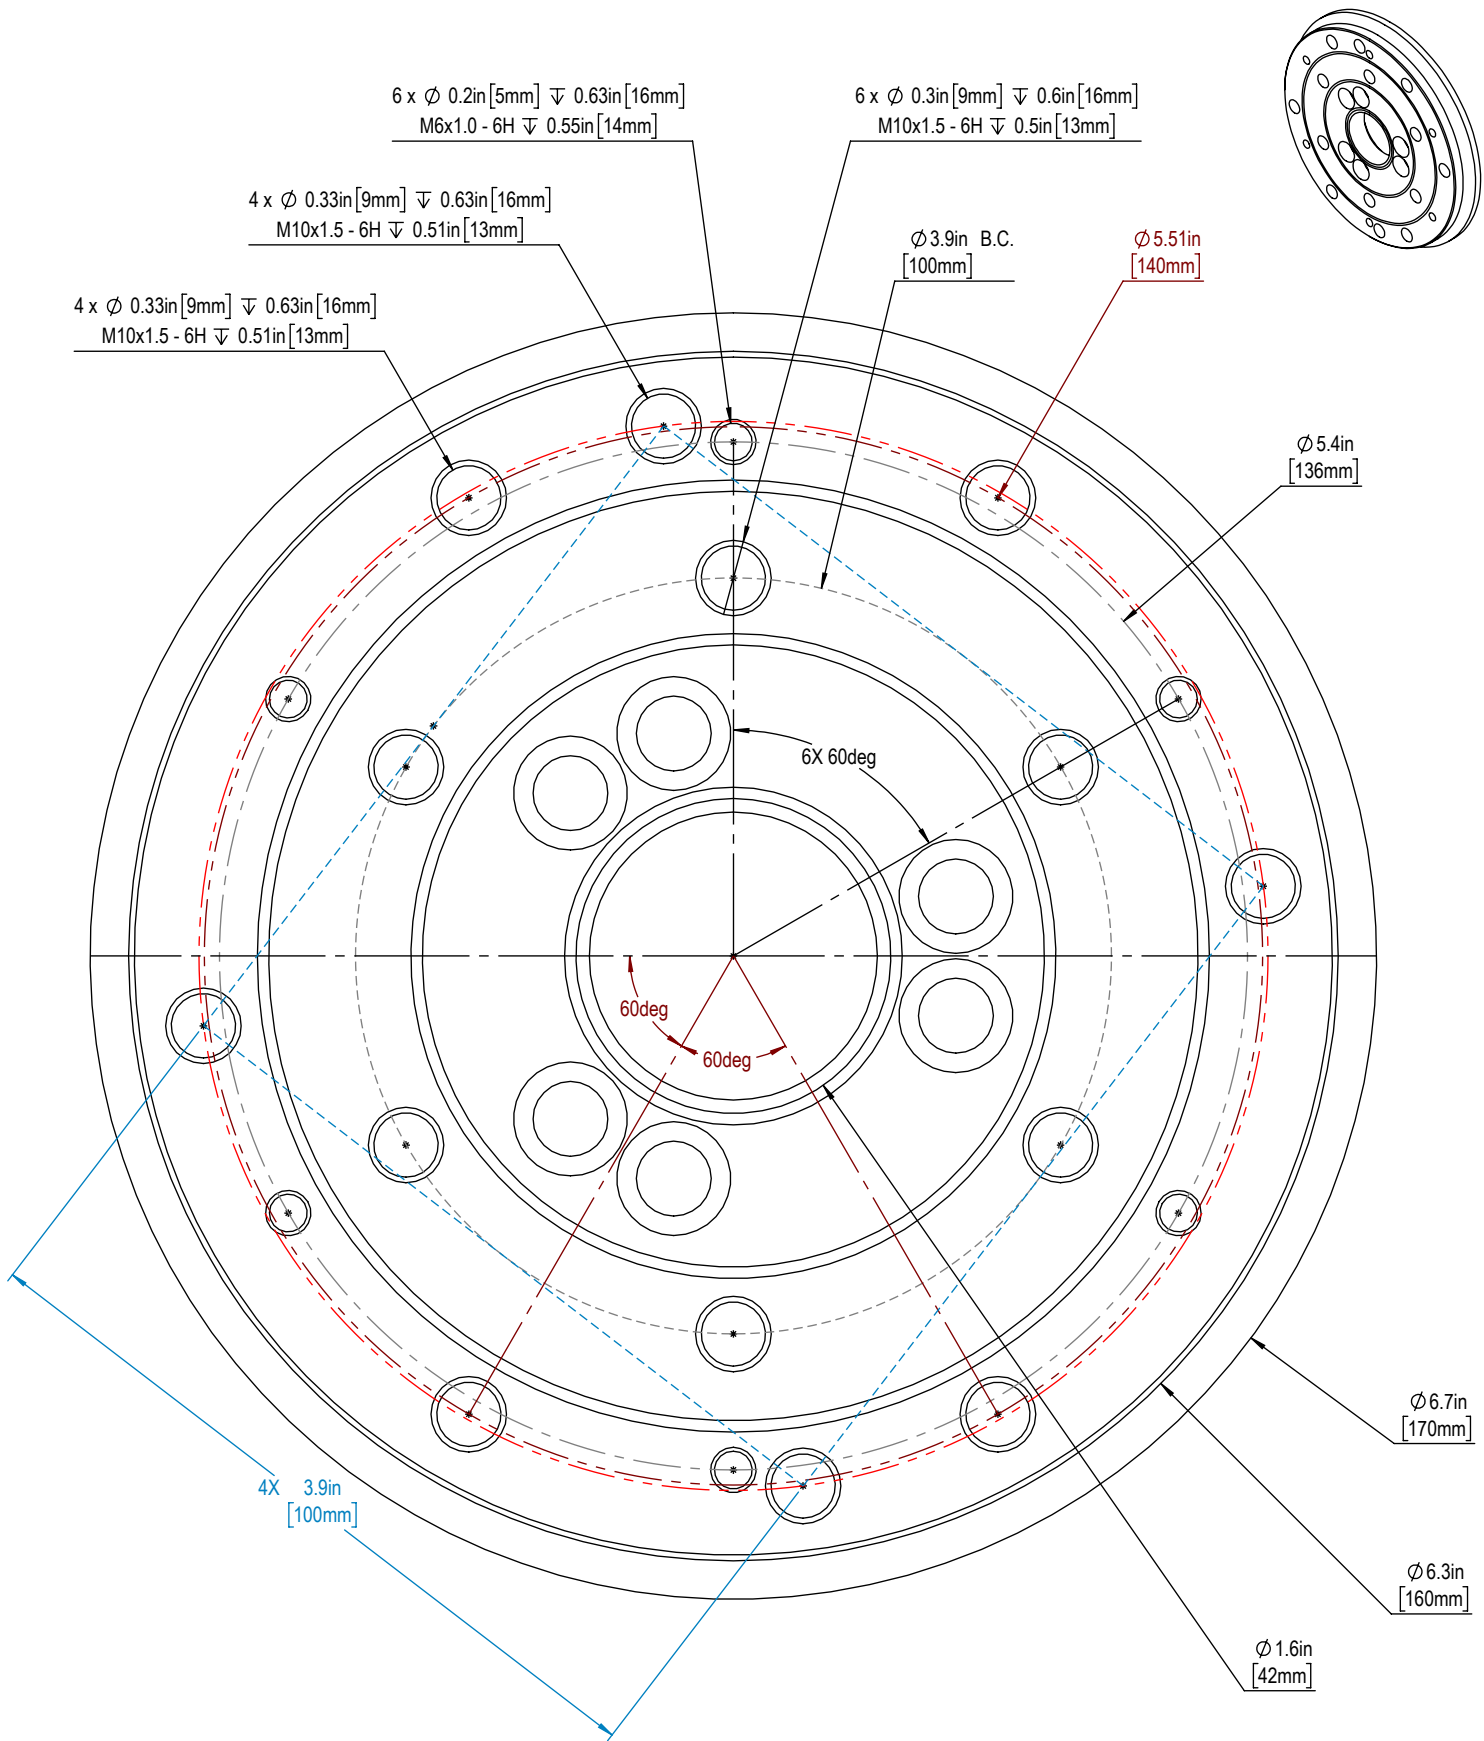

BOTTOM HOLE DIMENSIONS



- 8X $\varnothing 0.27\text{in}$ [6.8mm] THRU ALL
- $\varnothing 0.41\text{in}$ [10.3mm] $\nabla .26\text{in}$ [6.5mm]
- 8X $\varnothing .16\text{in}$ [4.0mm] $\nabla .49\text{in}$ [12.4mm]
- 10-32UNF-2B $\nabla .38\text{in}$ [9.7mm]






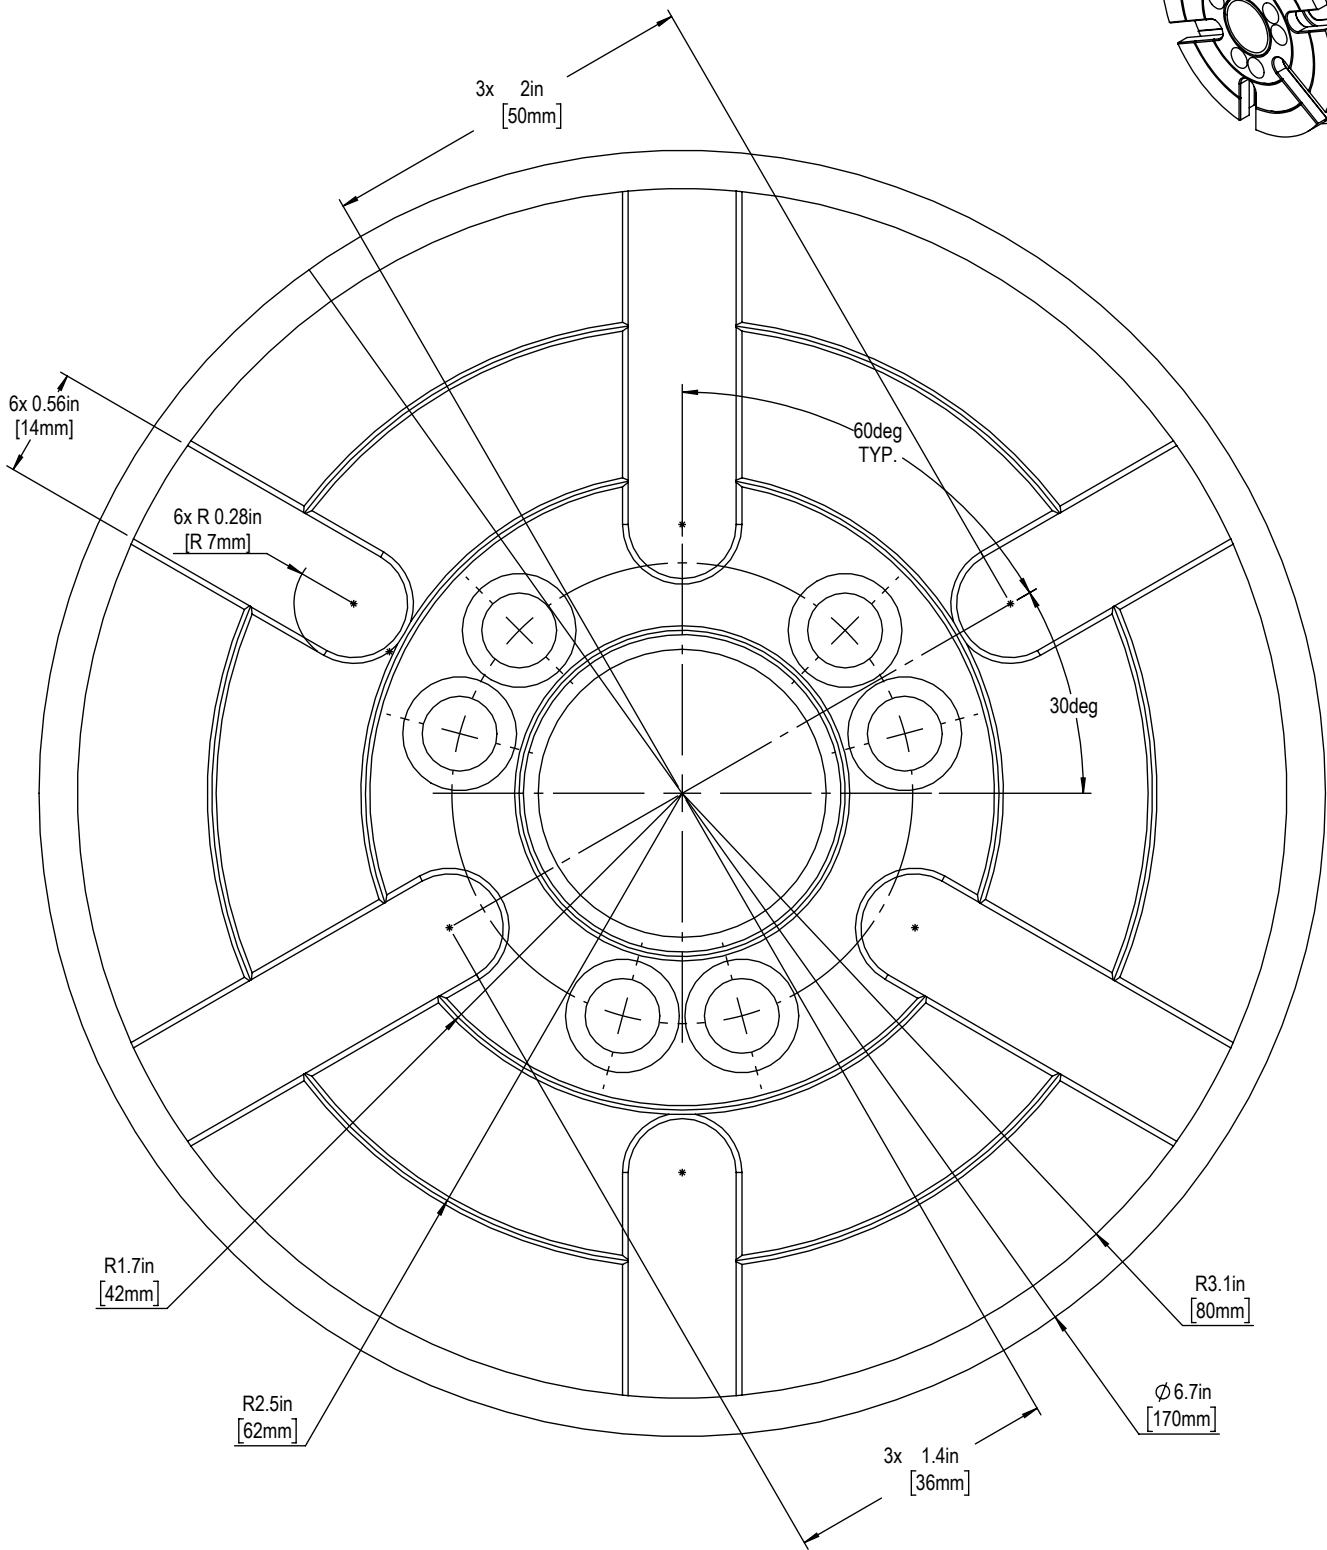



NOTE: BHC AND SPINDLE NOSE DIMENSIONS ARE PER AMERICAN STANDARD BULLETIN ASA B5.9-1960

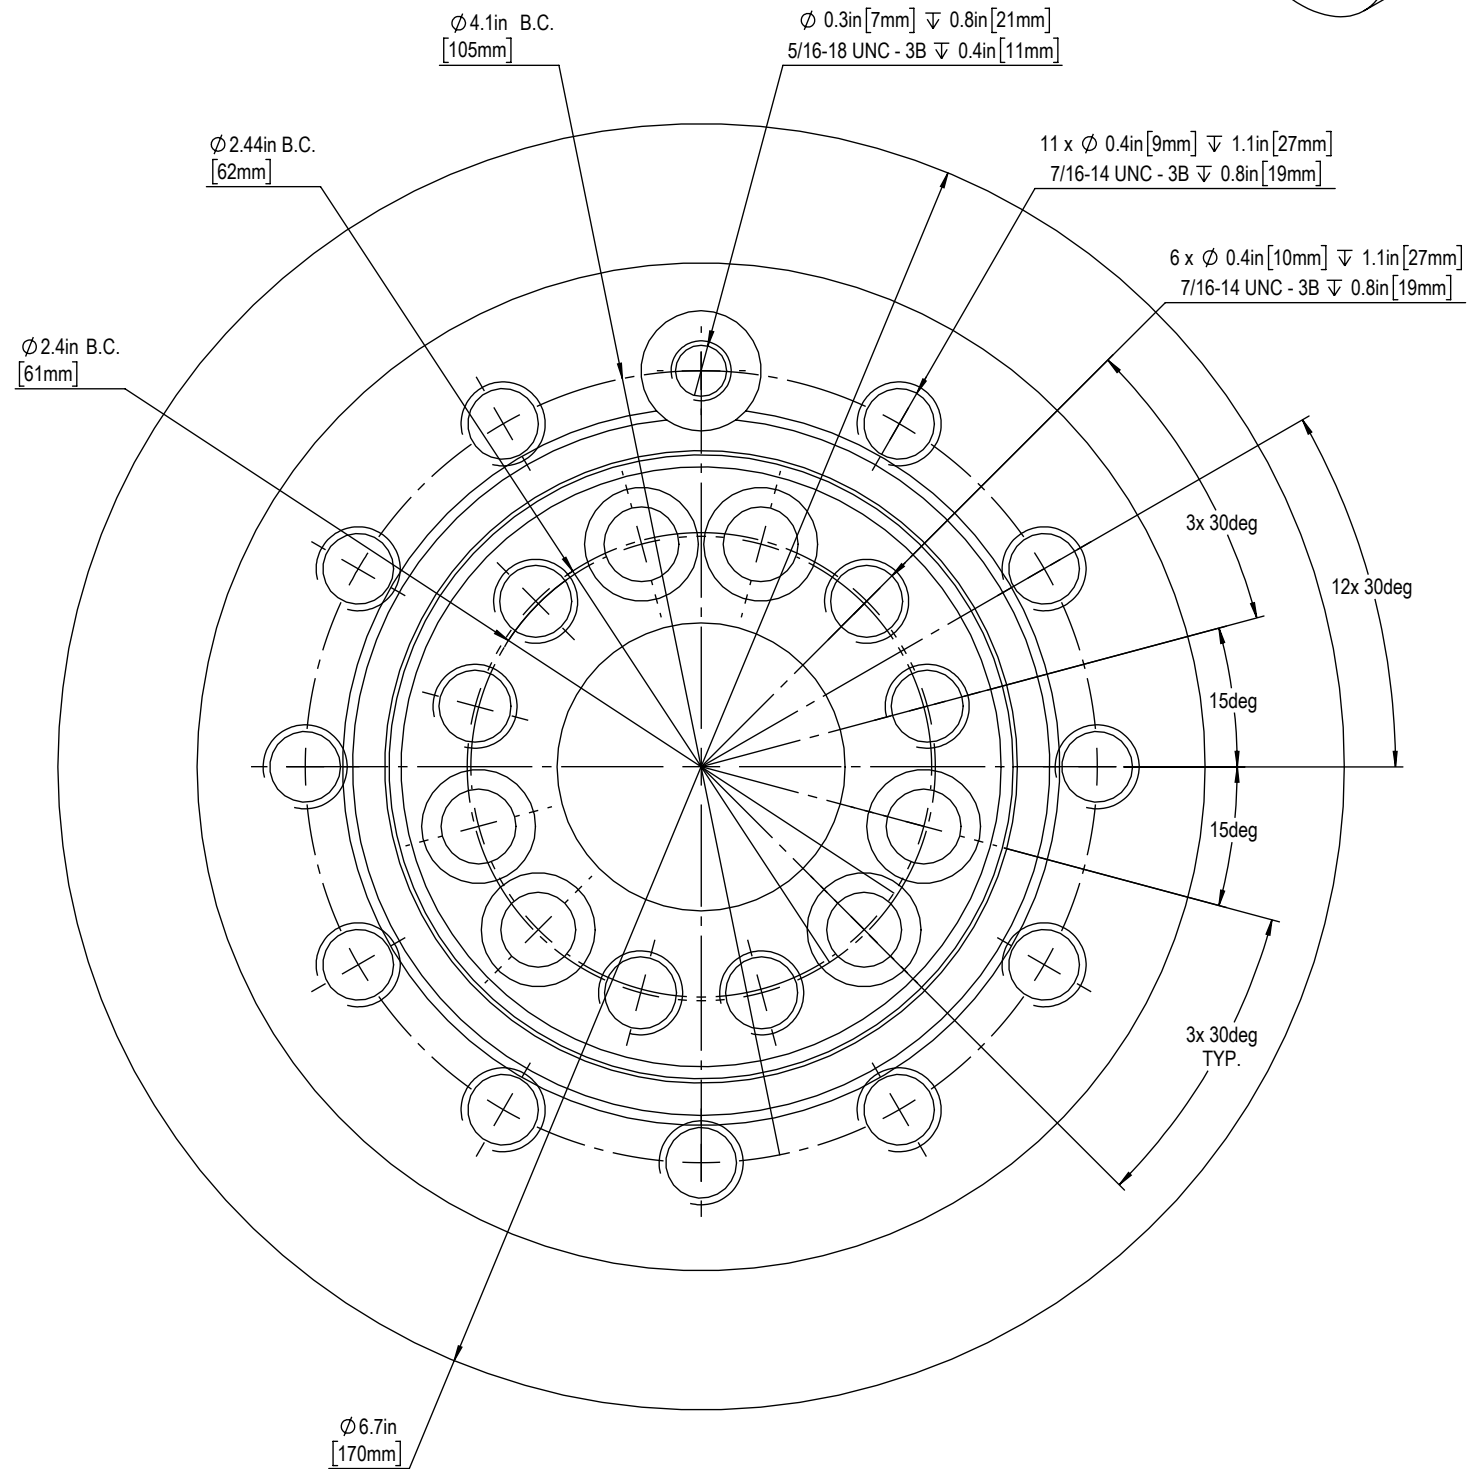

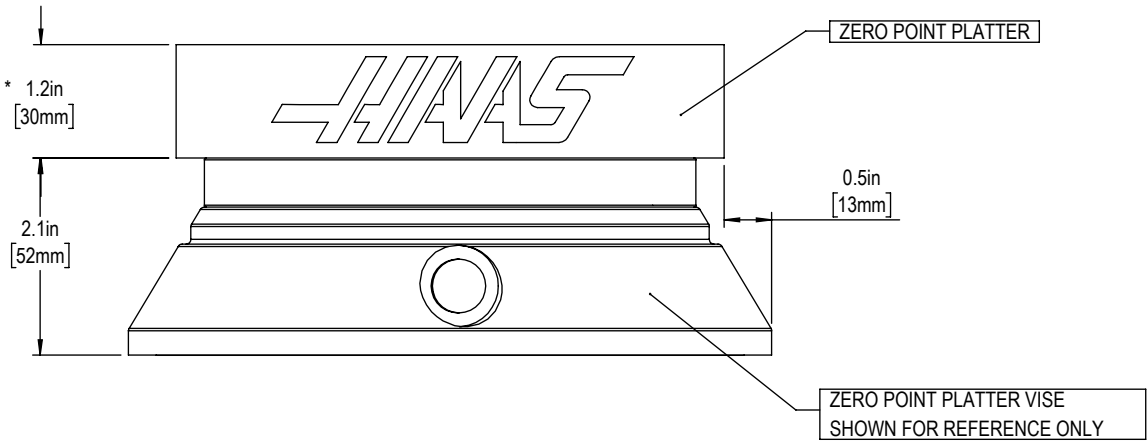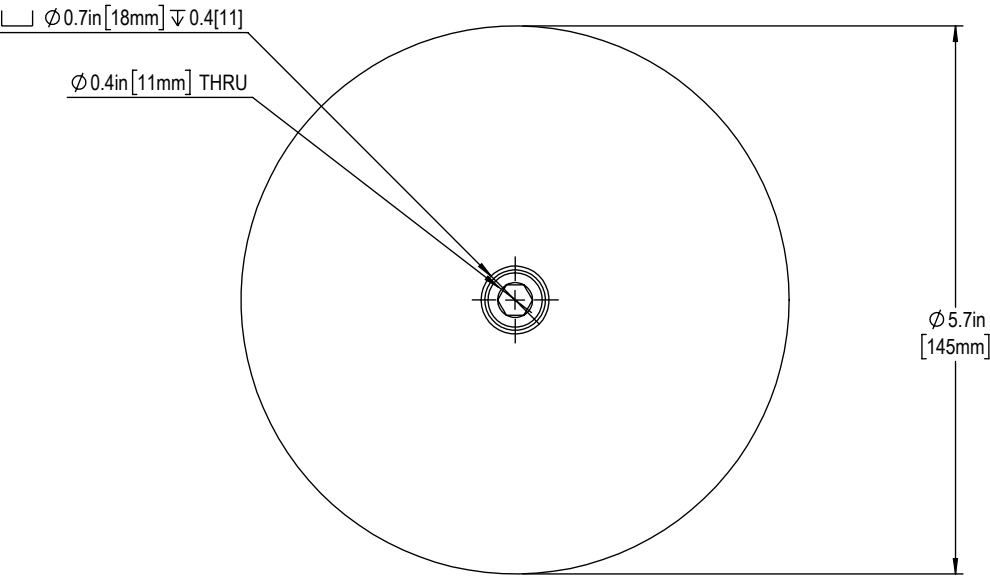

***NOTE:** MAXIMUM HOLE DRILL DEPTH IN PLATTER IS 1.1" USING DRILL TIP AS REFERENCE. DO NOT DRILL THRU PLATTER.